
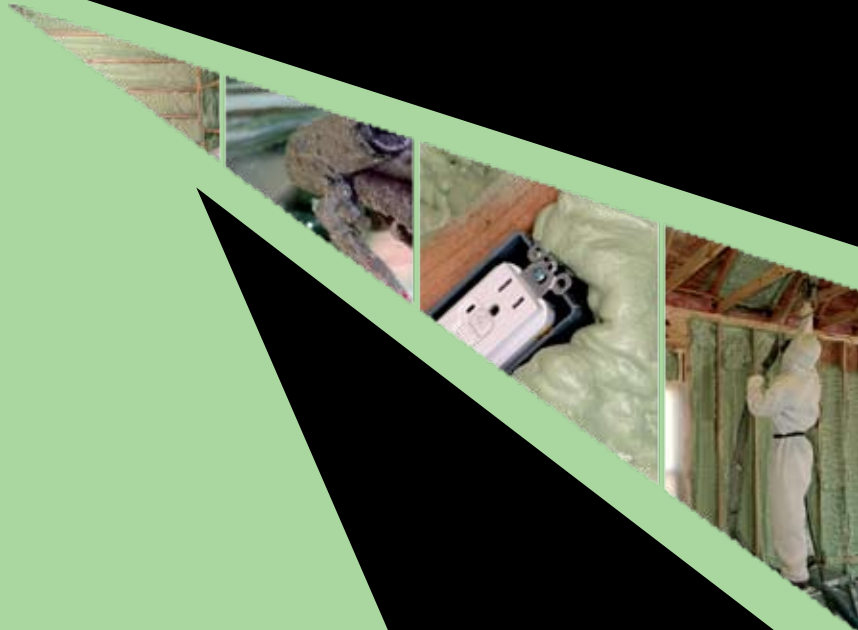


FOAMETIX[®]

"OUR FOAM IS GREEN"

FX 100

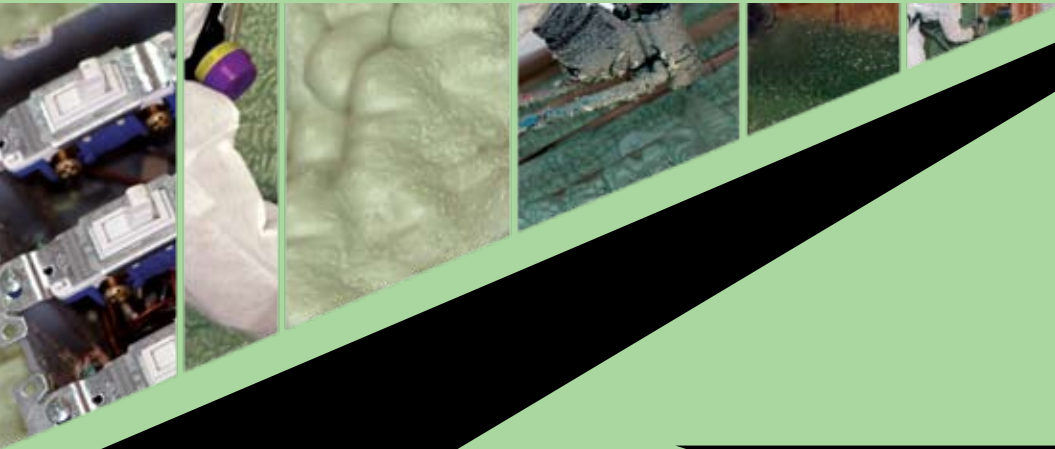

PRODUCT INFORMATION:

FX 100 is a two component, water blown, polyurethane open cell spray foam system. The in-place density is 1.00 -1.2 lbs/ft³. Low viscosity and 1:1 by volume ratio provide for easy processing. The foam is rated CLASS I according to ASTM E 84 at four inches.

USES:

FX 100 is designed for use in applications such as Insulation Foams, Sound Attenuation, and Void Fill... FX 100 meets or exceeds ICC-ES AC 12 acceptance criteria for plastic foam insulation.

LIQUID COMPONENTS	TEST METHOD	COMPONENT A	COMPONENT B
Viscosity, cps @ 74°F cps	ASTM D-2196 Spindle #2 @ 300 rpm	200 +/- 50	200 +/- 50
Specific Gravity @ 74°F	ASTM D-1638	1.24 g/cc	1.08 g/cc
Color	Visual	Dark Brown	Green
Weight Per Gallon	From Specific Gravity	10.33	8.90

LIQUID COMPONENTS	TEST METHOD	REGULAR	FAST
Reactivity (Rise Time)	Hand Mix	4-6 Sec	2-4 Sec

CURED FOAMS TYPICAL PHYSICAL PROPERTIES: (Data Derived From Laboratory Samples)

PROPERTY	TEST METHOD	RESULTS
Density	ASTM D-1622	1.0 – 1.2 pcf
R-Value	ASTM C-518	4.41
Tensile Strength	ASTM D-1623	37 psi
Compressive Strength	ASTM D- 1621	9 psi
Open Cell Content	ASTM D-1940	>85%
Dimensional Stability	ASTM D-2126	+ 2% max
Water Vapor Transmission	ASTM E-96	8 perm in

Burtin Polymer Laboratories

100 Enterprise Drive
Cartersville, GA 30120
P:770-607-0755 F:770-607-0334
www.burtinlabs.com

For a Foametix Dealer

1-800-Foametix www.foametix.com