
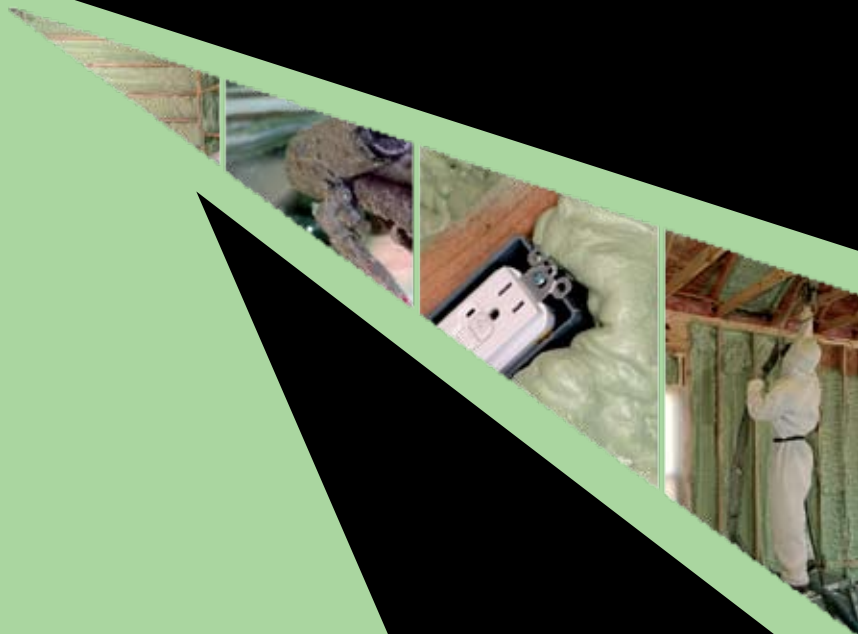


FOAMETIX[®]

"OUR FOAM IS GREEN"

FX 200

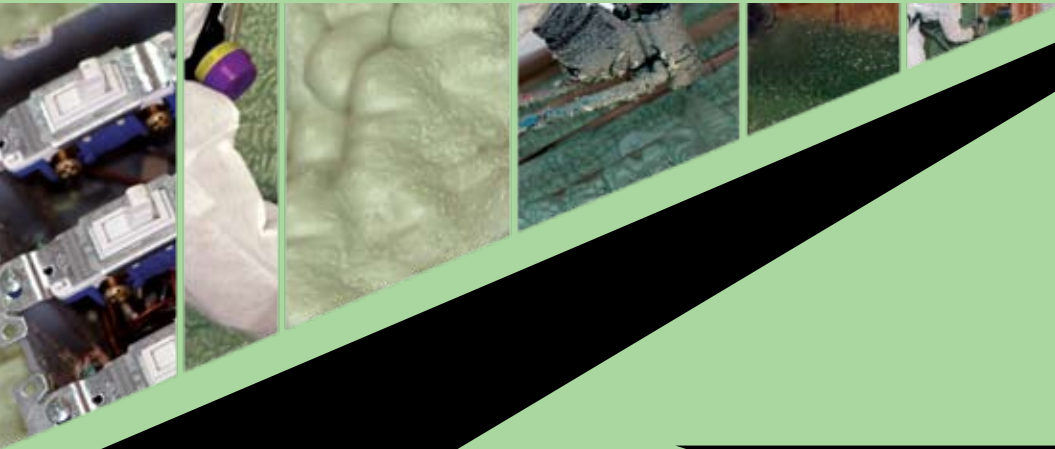

PRODUCT INFORMATION:

FX 200 is a two component, water blown, polyurethane spray foam system. The in-place density is 2 lbs/ft³. Low viscosity and 1:1 by volume ratio provide for easy processing. The foam is rated CLASS I according to ASTM E 84 at four inches.

USES:

FX 200 is designed for use in applications such as Insulation Foams, Spa, and Void Fill... Its ease of application and outstanding physical properties allow for a wide range of products to benefit from FX 200's exceptional fire resistance. FX 200 meets or exceeds ICC-ES AC 12 acceptance criteria for plastic foam insulation.

LIQUID COMPONENTS	TEST METHOD	COMPONENT A	COMPONENT B
Viscosity, cps @ 74°F cps	ASTM D-2196 Spindle #2 @ 300 rpm	200-300	650 +/- 100
Specific Gravity @ 74°F	ASTM D-1638	1.24 g/cc	1.08 g/cc
Color	Visual	Dark Brown	Green
Weight Per Gallon	From Specific Gravity	10.33	8.90

LIQUID COMPONENTS	TEST METHOD	REGULAR	FAST
Reactivity (Rise Time)	Hand Mix	4-6 Sec	2-4 Sec

CURED FOAMS TYPICAL PHYSICAL PROPERTIES: (Data Derived From Laboratory Samples)

PROPERTY	TEST METHOD	RESULTS
Density	ASTM D-1622	2.0 pcf
Compressive Strength, Parallel	ASTM D-1621	20 psi
R Value	ASTM C-518	5.5
Lambda Value	ASTM C-518	0.026
Tensile Strength	ASTM D-1623	38 psi
Closed Cell Content	ASTM D-1940	88% min.
Dimensional Stability	ASTM D-2126	+ 4% max
Moisture (Perm/Inch)	ASTM C-355	1.4

Burtin Polymer Laboratories

100 Enterprise Drive
Cartersville, GA 30120
P:770-607-0755 F:770-607-0334
www.burtinlabs.com

For a Foametix Dealer

1-800-Foametix www.foametix.com